

TYRE CATALOGUE

ALL STEEL TRUCK & BUS RADIAL



BARO **GOODRIDE**
REIFENHANDEL AUS LEIDENSCHAFT

Made in Thailand





- A Company Established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 8 of Top 75 Global Tyre Manufacturers in Year 2022
- Sale Revenue Reached USD4.5 Billion in Year 2021

Zhongce Rubber Group Co., Ltd (ZC RUBBER) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.



CONTENTS



GOODRIDE
PREMIUM TIRES

About ZC-Rubber 01 - 02

A  05 - 09
All Routes

L  10 - 13
Long Haul

R  14 - 17
Regional

M  18 - 21
Mixed Service

W  22 - 24
Winter

U  25 - 26
Urban

Eu Tyre Label 27



All Routes



MultiNavi S1



- Four straight tread grooves guarantee excellent water drainage
- Special designed tread pitches ensure low external noise
- Multi kerf provides outstanding traction on wet and snow road surface
- Computer designed tyre casing promises good footprint to extend tyre life



All Routes

- Hybrid concept of long haul and regional application
- Excellent fuel efficiency with maximum mileage
- Improved road grip prepare for various road surface



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
355/50R22.5	L/20	156K(154L)	D	C	74/B	14.0	11.75	928	361	4000	8820	900	130	-	-	-	-
385/55R22.5	L/20	160K(158L)	C	B	74/B	14.0	12.25	996	386	4500	9920	900	130	-	-	-	-
315/70R22.5	L/20	156/150L	D	C	74/B	15.0	9.00	1014	312	4000	8820	900	130	3350	7390	900	130
295/60R22.5	J/18	150/147K	D	C	74/B	14.5	9.00	926	292	3350	7390	900	131	3075	6780	900	131
315/60R22.5	L/20	150/150L(152/148M)	D	C	74/B	13.5	9.75	950	313	3750	8270	800	130	3350	7390	900	130
295/80R22.5	J/18	154/149M	D	C	74/B	16.0	9.00	1044	298	3750	8270	900	131	3250	7160	900	131
315/80R22.5	J/18	156/153L(154/151M)	D	C	74/B	16.0	9.00	1076	312	4000	8820	850	123	3650	8050	850	123



MultiDrive D1

M+S



- Deep tread depth ensures longer tyre life
- Directional tread pattern and robust tread blocks produce outstanding traction on both dry and wet road surface
- Excellent footprint design promises even wear and remarkable tyre life
- Special shoulder design with low-heating compound minimizes shoulder heel & toe wear
- Applicable for snow roads with excellent traction capabilities



MultiAp T1

M+S



- Four grooves with zigzag designed provide excellent stone ejection and groove crack prevention
- Wide and solid shoulder design guarantee long mileage
- Stone ejectors in U-shape grooves minimize the stone holding and penetration
- Special tread compound guarantees less fuel consumption with lower rolling resistance



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150L	E	C	74/B	19.0	9.00	1020	312	3750	8270	900	130	3350	7390	900	130
295/80R22.5	J/18	152/149M	E	C	74/B	20.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	156/153L(154/151M)	E	C	74/B	21.0	9.00	1082	312	4000	8820	850	123	3650	8050	850	123

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/55R22.5	L/20	160K(158L)	D	C	74/B	15.0	12.25	992	386	4500	9920	900	130	-	-	-	-
385/65R22.5	L/20	160K(158L)	C	C	74/B	15.0	11.75	1072	389	4500	9920	900	130	-	-	-	-



All Routes



MultiAp T2

M+S



- Wide base trailer tyre specially design for trailer service
- Low rolling resistance compound reduces the loss of energy and results in increased fuel efficiency
- The pattern with two main straight channel grooves and wider ribs maximizes the fuel efficiency performance and provides better driving comfort
- The robust shoulder ribs provide driving stability and prevent uneven wear
- The four zigzag grooves ensure the all-season performance on wet and dry road




Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/45R19.5	L/20	160J(156K)	C	C	74/B	12.0	15.00	895	446	4500	9920	900	131	-	-	-	-
435/50R19.5	L/20	160J(156K)	C	C	74/B	12.0	14.00	931	438	4500	9920	900	131	-	-	-	-



Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance

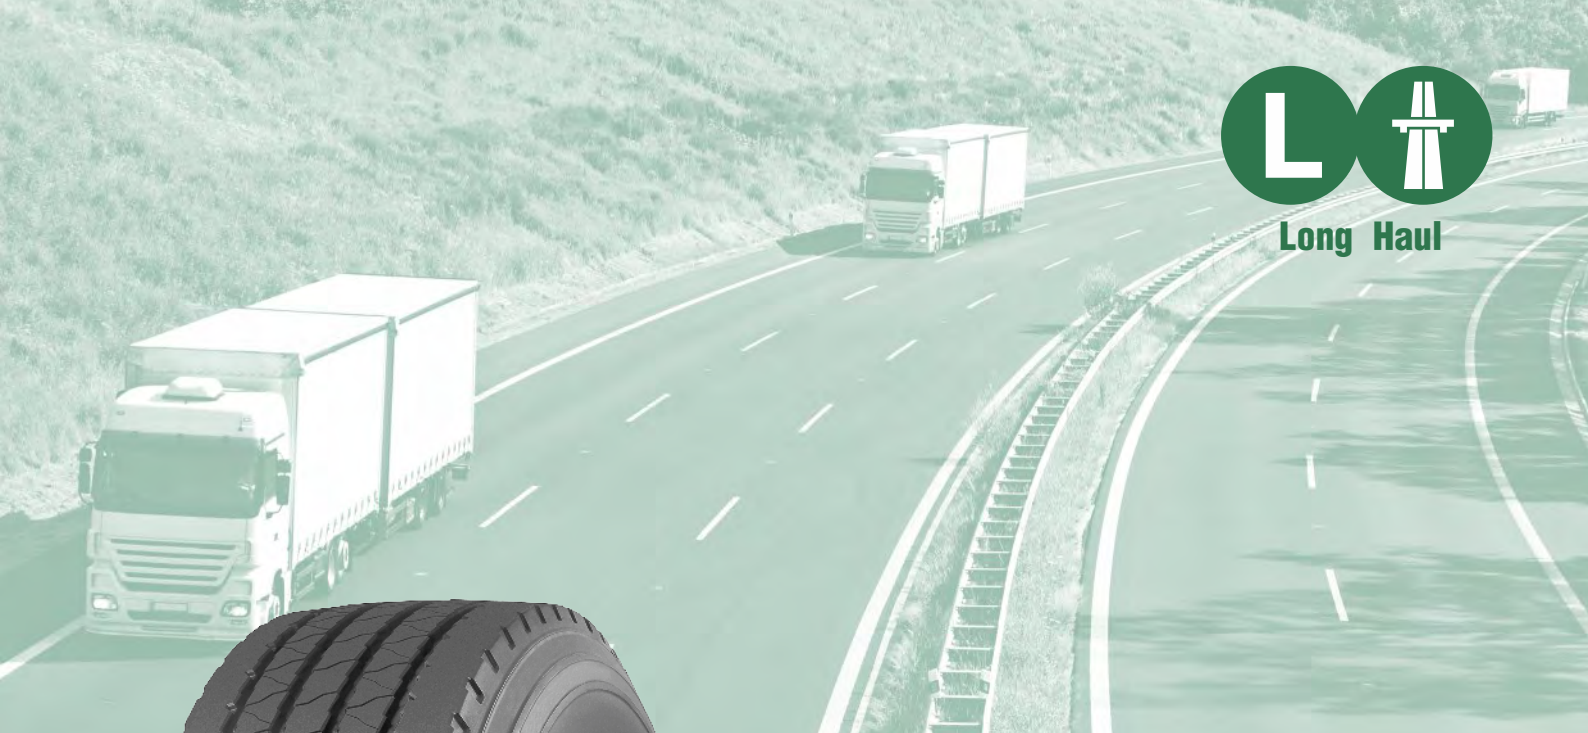

MultiDrive_{ECO} D2



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK performer



MultiAp_{ECO} Z1



- Super value tyre suitable for steer and trailer axle
- Multi kerf provides outstanding traction on wet and snow road surface
- Four grooves with zigzag designed provide excellent groove crack prevention



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual														Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
295/60R22.5	J/18	150/147K	E	C	74/B	19.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131	385/55R22.5	L/20	160K(158L)	C	B	73/B	13.0	12.25	996	386	4500	9920	900	130	-	-	-	-
315/60R22.5	J/18	152/148M	E	C	74/B	18.0	9.75	950	313	3550	7830	900	130	3150	6940	900	130	385/65R22.5	L/20	160K	C	C	73/B	13.5	11.75	1072	389	4500	9920	900	130	-	-	-	-
315/70R22.5	L/20	154/150L	E	C	74/B	18.0	9.00	1020	312	3750	8270	900	130	3350	7390	900	130	315/70R22.5	L/20	156/150L	C	C	73/B	13.5	9.00	1014	312	4000	8820	900	130	3350	7390	900	130
295/80R22.5	J/18	152/149M	E	C	74/B	18.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131	295/80R22.5	J/18	152/149M	C	C	73/B	14.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/150L)	E	B	74/B	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120	315/80R22.5	J/18	156/153L(154/151M)	C	C	73/B	14.0	9.00	1076	312	4000	8820	850	123	3650	8050	850	123



CR931

M+S

- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



- Shorter journey with frequent braking, accelerating and turning
- Improved road grip with maximum mileage
- Exceptional tough type

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single		Dual					
425/65R22.5	L/20	165K	C	C	73/B	15.0	12.25	1124	430	(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/65R22.5	L/20	169K	C	C	73/B	15.0	13.00	1150	444	5150	11340	830	120	-	-	-	-
										5800	12775	900	130	-	-	-	-



GSR+1



- New steer tyre engineered with innovative GOODRIDE's latest technology for local and regional operations with rims of 17.5" and 19.5".
- Computer designed 5-Rib tread provides precise handling.
- Tread sipes alongside tread grooves offer outstanding wet operation and even tread contact on road surface.
- Advanced tyre casing design promises good footprint and avoids uneven wear.



GDR+1



- New drive tyre designed for local and regional application with rims of 17.5" and 19.5".
- Deep tread depth and wider tread with robust tread blocks ensure outstanding traction on both dry and wet road surfaces.
- Excellent footprint design promises even wear and remarkable tyre life.



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual														Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
245/70R17.5	H/16	136/134M	E	D	72/B	13.0	6.75	789	248	2240	4940	850	123	2120	4675	850	123	245/70R17.5	H/16	136/134M	E	D	74/B	15.0	6.75	789	248	2240	4940	850	123	2120	4675	850	123
205/75R17.5	G/14	124/122M(126/124G)	E	D	72/B	12.0	6.00	753	205	1600	3525	750	109	1500	3305	750	109	205/75R17.5	G/14	124/122M	E	D	74/B	15.0	6.00	753	205	1600	3525	750	109	1500	3305	750	109
215/75R17.5	G/14	128/126M	E	D	72/B	13.0	6.00	767	211	1800	3970	760	110	1700	3750	760	110	215/75R17.5	G/14	128/126M	E	D	74/B	15.0	6.00	767	211	1800	3970	760	110	1700	3750	760	110
225/75R17.5	G/14	129/127M	E	D	72/B	13.0	6.75	783	226	1850	4080	725	105	1750	3860	725	105	225/75R17.5	G/14	129/127M	E	D	74/B	16.0	6.75	783	226	1850	4080	725	105	1750	3860	725	105
235/75R17.5	G/14	132/130M	E	D	72/B	14.0	6.75	797	233	2000	4410	775	112	1900	4190	775	112	235/75R17.5	G/14	132/130M	E	D	74/B	16.0	6.75	797	233	2000	4410	775	112	1900	4190	775	112
245/70R19.5	H/16	136/134M	D	D	72/B	13.0	7.50	839	248	2240	4940	830	120	2120	4675	830	120	245/70R19.5	H/16	136/134M	E	C	74/B	15.0	7.50	839	248	2240	4940	830	120	2120	4675	830	120
265/70R19.5	H/16	140/138M	D	D	72/B	13.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112	265/70R19.5	H/16	140/138M	E	C	74/B	16.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112
285/70R19.5	H/16	146/144M	D	D	72/B	13.0	8.25	895	283	3000	6610	850	123	2800	6175	850	123	285/70R19.5	H/16	146/144M	E	C	74/B	16.0	8.25	895	283	3000	6610	850	123	2800	6175	850	123



GTX1

M+S

- New trailer tyres with advanced ZC-Rubber technology for long haul and regional application.
- Strong computer designed tyre casing guarantees outstanding capacity for heavy loads and highway.
- Special sipes alongside tread ribs help to minimize heating for high speed running with heavy loads.
- Special tread compound provides higher fuel efficiency with lower rolling resistance without sacrificing tyre mileage.



Mixed Service

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
205/65R17.5	J/18	129/127K(132/132F)	D	C	71/B	12.0	6	711	205	1850	4080	900	130	1750	3860	900	130
215/75R17.5	H/16	135/133J	D	C	71/B	12.0	6	767	211	2180	4805	850	123	2060	4540	850	123
235/75R17.5	H/16	143/141J(144/144F)	D	C	71/B	12.0	6.75	797	233	2725	6005	875	128	2575	5675	875	128
245/70R17.5	J/18	143/141J(146/146F)	D	C	71/B	12.0	7.5	789	248	2725	6005	875	128	2575	5675	875	128
245/70R19.5	J/18	141/140J	C	C	71/B	12.0	7.5	839	248	2575	5675	850	123	2500	5510	850	123
265/70R19.5	J/18	143/141J	C	C	71/B	12.0	7.5	867	262	2725	6005	850	123	2575	5675	850	123
285/70R19.5	J/18	150/148J	C	C	72/B	12.0	8.25	895	283	3350	7390	900	130	3150	6940	900	130



Mixed Service
On & Off



Mixed Service
On & Off



SupGuard M1

M+S



- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage



CR926/B

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/65R22.5	L/20	160K(158L)	D	C	72/B	18.0	11.75	1072	389	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	165K	D	C	73/B	18.0	12.25	1124	430	5150	11340	830	120	-	-	-	-
445/65R22.5	L/20	169K	D	C	73/B	18.0	13.00	1150	444	5800	12775	900	130	-	-	-	-
13R22.5	J/18	156/151K	D	C	75/B	16.5	9.75	1136	320	4000	8820	875	128	3450	7610	875	128
315/80R22.5	J/18	154/151M(156/150L)	D	C	73/B	17.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	156/151K	D	C	73/B	16.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128
315/80R22.5(CR926B)	J/18	154/151M(156/150L)	D	C	73/B	16.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120



Mixed Service
On & Off



SupTrac X1



- Premium tyre designed for drive position applicable for rough road surface
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition
- Special rubber compound ensuring more resistance to cuts and tearing



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	156/151K	E	C	74/B	23.0	9.75	1136	320	4000	8820	875	128	3450	7610	875	128
315/70R22.5	L/20	156/150K	E	C	74/B	21.0	9.00	1020	312	4000	8820	900	130	3350	7390	900	130
295/80R22.5	J/18	152/149K	E	B	74/B	22.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151L(156/150K)	E	B	74/B	23.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120



Winter

- Designed for winter use only
- Extraordinary traction on snow and ice road surface





Winter



IceGuard N1

M+S



- New Steer tyre with ZC-Rubber's latest technology for winter application.
- Wide and deep circumferential grooves enhances removal of snow and ice.
- Specific tread compound keep rubber softness in low temperature with good performance.
- Wide tread with advanced block and sipe design provides extra traction for snow and ice road conditions.



Winter



IceTrac N2

M+S



- New drive tyre with ZC-Rubber's latest technology for winter application.
- Wide open shoulder deliver additional traction without compromising tread life.
- Specific tread compound keep rubber softness in low temperature with good performance.
- Studable tread design provides extra traction for snow and ice road conditions.



Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/55R22.5	L/20	160K	D	B	74/B	15.0	12.25	996	386	4500	9920	900	130	-	-	-	-
385/65R22.5	L/20	160K	D	B	74/B	16.0	11.75	1072	389	4500	9920	900	130	-	-	-	-
315/70R22.5	L/20	156/150L(152/148M)	E	C	73/B	17.0	9.00	1020	312	4000	8820	900	130	3350	7390	900	130
295/80R22.5	J/18	154/149L	E	C	73/B	18.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	154/151M(156/153L)	E	C	73/B	18.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150K(152/148L)	E	C	74/B	19.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130
295/80R22.5	J/18	154/149L	E	C	74/B	21.0	9.00	1050	298	3750	8270	900	131	3250	7160	900	131
315/80R22.5	J/18	156/153K(154/151L)	E	C	74/B	21.0	9.00	1082	312	4000	8820	850	123	3650	8050	850	123



Urban



CityElite U1



- Variable pitch tread design helps reduce noise and Improve driving stability performance
- Zigzag grooves together with an optimal block provide an improved traction performance
- Excellent sidewall protection minimizes scuff damage from turning and braking




Urban

- Frequent speed changes and turning
- Resistance to curb impact
- Excellent road grip and durable high mileage

Size	LR / PR	Service index				Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
275/70R22.5	H/16	150/145J				20.0	8.25	964	276	3350	7390	900	130	2900	6395	900	130

Lowering car emissions with EU tyre labels

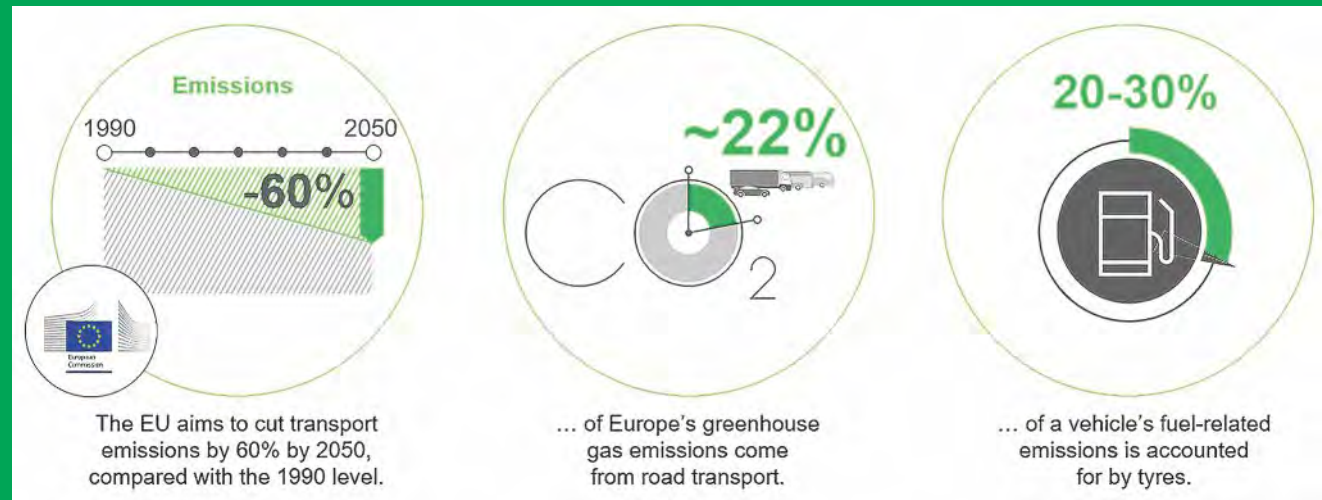


The EU has committed to cutting its greenhouse gas emissions to reach climate neutrality by 2050. Reducing CO₂ emissions from road transport plays a major part in fulfilling these goals.

Choosing more fuel-efficient tyres can contribute to reducing transport emissions. In order to help consumers make informed decisions, the EU is introducing a new labelling scheme for tyres which will come into force on May 1, 2021.

The EU tyre label will allow EU consumers to choose more fuel-efficient tyres, which can lead to great savings for both end users and commercial users in terms of both costs and emissions. Road safety is improved through better wet grip while information on noise levels help reduce traffic-related noise pollution.

The New EU Tyre Label

- > Under the **new regulation**, bus and truck tyres will also be covered (**tyre class C1, C2, C3**).
- > Additional information (**tyre type identifier** = art. no.).
- > In addition to the standard label, there are also options for including icons relating to **severe snow conditions** (3PMSF) and/or grip in icy conditions (for C1 tyres only).
- > **Noise classes**: ABC replace sound waves.
- > **Reclassification for lower label classes**:
D is the new E; Class D no longer empty (for C1 & C2 tyres only); F and G merge to form E.
- > **QR code** for each tyre type identifier with link to EU product database (EPREL).

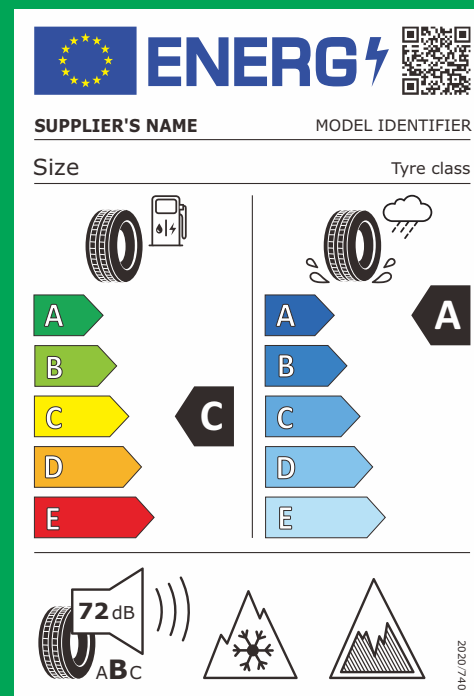

NOTES:

GOODRIDE



www.goodridetire.com



www.facebook.com/goodridetireglobal



ZHONGCE RUBBER GROUP CO., LTD.



www.zc-rubber.com



www.facebook.com/zcrubber



www.twitter.com/zc_rubber



www.linkedin.com/company/zcrubber

BARO

REIFENHANDEL AUS LEIDENSCHAFT

1st Edition (2023), Printed in China