

BARO
REIFENHANDEL AUS LEIDENSCHAFT

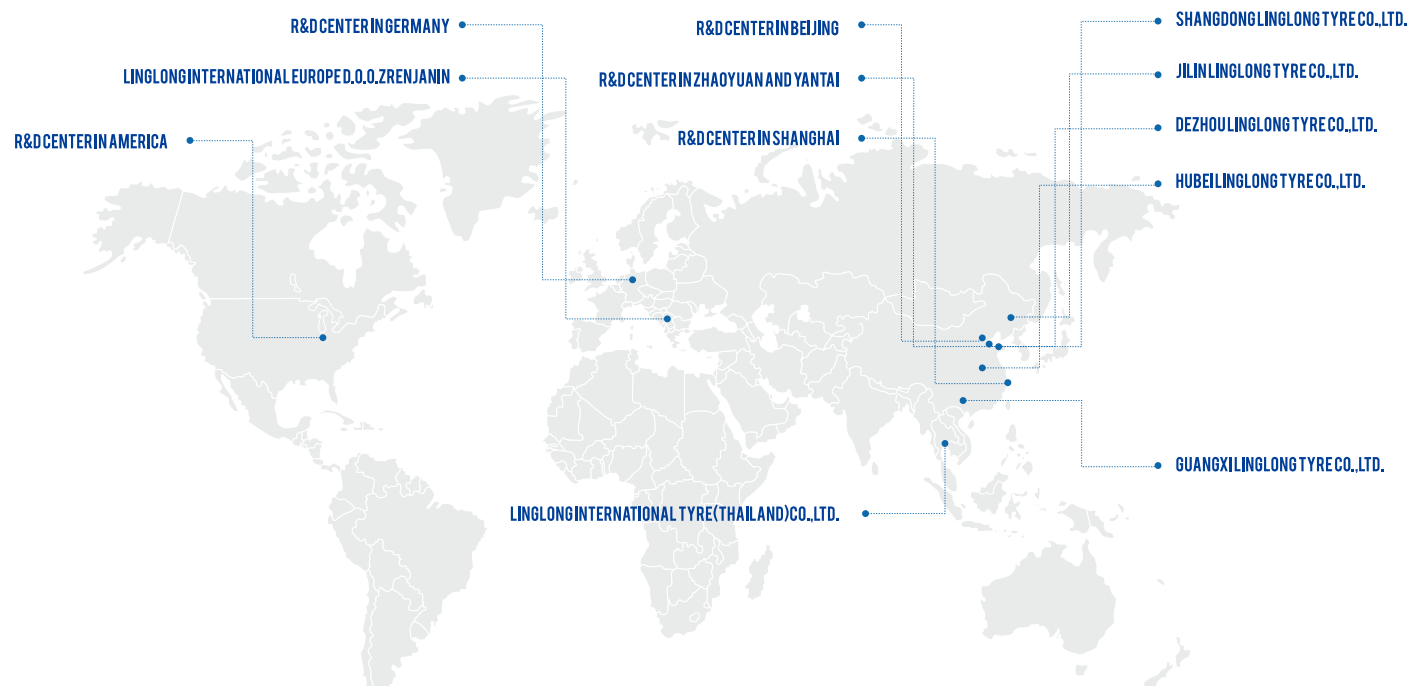

LINGLONG TIRE

SPECIAL TIRE





INTERNATIONAL STRATEGY



In order to promote its high-quality global industrial layout and increase its core brand competitiveness in global market, Linglong formulates its 6+6 global layout to build six Chinese manufacturing bases as well as six overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun (under construction) and two overseas manufacturing bases in Thailand and Serbia (under construction). Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 6+6 global layout, and fully utilizing global resources and expanding its global tire market.

REIFENHANDEL AUS LEIDENSCHAFT

BaRO GMBH
REIFENHANDEL AUS LEIDENSCHAFT

OFFIZIELLER VERTRIEBSPARTNER IN DEUTSCHLAND

+49 (40) 219 0 129-0
Melden Sie sich telefonisch bei uns,
wir beraten Sie gerne.

BaRo GmbH
Hans-Duncker-Straße
9 21035 Hamburg

info@baro-reifen.de
www.baro-reifen.de
www.shop.baro-reifen.de

Agricultural Tire

Tractors



LR861 Radial Agricultural Tire

- 1. Better traction and braking performance.
- 2. Save work time and fuel.
- 3. Better running stability.
- 4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
280/85R24	115/112	A8/B	W9W10	1215	160	1086	282	39.0	10km/h	860	1005	1150	1290	1435	1575							
									30km/h	710	825	945	1060	1180	1300							
									40km/h	665	775	885	995	1105	1215							
									50km/h	615	715	815	915	1015	1120							
320/85R24	122/119	A8/B	W9W10W11	1500	160	1154	319	41.0	10km/h	1070	1245	1420	1595	1770	1950							
									30km/h	880	1025	1170	1315	1460	1605							
									40km/h	825	960	1095	1230	1365	1500							
									50km/h	745	870	990	1115	1235	1360							
320/85R28	124/121	A8/B	W9W10W11	1600	160	1255	319	41.0	10km/h	1140	1325	1510	1700	1890	2080							
									30km/h	940	1090	1245	1400	1555	1710							
									40km/h	880	1020	1165	1310	1455	1600							
									50km/h	795	925	1055	1185	1315	1450							
320/85R32	126/123	A8/B	W9W10W11	1700	160	1357	319	41.0	10km/h	1215	1410	1610	1805	2005	2210							
									30km/h	1000	1160	1325	1485	1650	1815							
									40km/h	935	1085	1240	1390	1545	1700							
									50km/h	850	990	1130	1270	1410	1550							
320/85R32	142/139	A8/B	W9W10W11	2650	400	1357	319	41.0	10km/h	1205	1410	1615	1825	2030	2200	2445	2580	3065	3270	3445		
									30km/h	990	1160	1330	1500	1670	1810	2010	2125	2520	2520	2690	2835	
									40km/h	925	1085	1245	1400	1560	1695	1880	1985	2355	2355	2515	2650	
									50km/h	850	995	1140	1285	1430	1555	1725	1820	2160	2160	2305	2430	
320/85R36	128/125	A8/B	W9W10W11	1800	160	1458	319	41.0	10km/h	1285	1495	1700	1915	2125	2340							
									30km/h	1055	1230	1400	1575	1745	1925							
									40km/h	990	1150	1310	1475	1635	1800							
									50km/h	905	1055	1200	1350	1500	1650							
340/85R24	125/122	A8/B	W11W12	1650	160	1188	343	42.0	10km/h	1175	1370	1560	1755	1950	2145							
									30km/h	965	1125	1280	1440	1605	1765							
									40km/h	905	1055	1200	1350	1500	1650							
									50km/h	825	960	1095	1230	1365	1500							
340/85R28	127/124	A8/B	W11W12	1750	160	1289	343	42.0	10km/h	1245	1455	1655	1865	2065	2275							
									30km/h	1025	1195	1360	1535	1700	1870							
									40km/h	960	1120	1275	1435	1590	1750							
									50km/h	880	1020	1165	1310	1455	1600							
340/85R32	142/139	A8/B	W11W12	2650	360	1391	343	42.0	10km/h	1275	1480	1685	1925	2135	2340	2580	2720	2995	3235	3445		
									30km/h	1045	1215	1385	1585	1755	1925	2125	2235	2465	2665	2835		
									40km/h	980	1135	1295	1485	1640	1800	1985	2090	2305	2490	2650		
									50km/h	895	1045	1190	1360	1505	1650	1820	1915	2110	2280	2430		
340/85R36	132/129	A8/B	W11W12	2000	160	1492	343	42.0	10km/h	1430	1660	1895	2130	2365	2600							
									30km/h	1175	1365	1560	1755	1945	2140							
									40km/h	1100	1280	1460	1640	1820	2000							
									50km/h	1015	1180	1350	1515	1680	1850							
340/85R38	133/130	A8/B	W11W12	2060	160	1543	343	42.0	10km/h	1465	1705	1950	2190	2430	2675							
									30km/h	1205	1405	1605	1800	2000	2200							
									40km/h	1130	1315	1500	1685	1870	2060							
									50km/h	1045	1215	1385	1555	1725	1900							
380/85R24	131/128	A8/B	W11W12W13	1950	160	1256	380	45.0	10km/h	1390	1615	1845	2070	2300	2535							
									30km/h	1140	1330	1515	1705	1890	2085							
									40km/h	1070	1245	1420	1595	1770	1950							
									50km/h	990	1150	1310	1475	1635	1800							
380/85R28	133/130	A8/B	W11W12W13	2060	160	1357	380	45.0	10km/h	1465	1705	1950	2190	2430	2675							
									30km/h	1205	1405	1605	1800	2000	2200							
									40km/h	1130	1315	1500	1685	1870	2060							
									50km/h	1045	1215	1385	1555	1725	1900							
380/85R30	135/132	A8/B	W11W12W13	2180	160	1408	380	45.0	10km/h	1550	1810	2065	2320	2570	2830							
									30km/h	1275	1490	1700	1905	2115	2330							
									40km/h	1195	1395	1590	1785	1980	2180							
									50km/h	1100	1280	1460	1640	1820	2000							
380/85R34	137/137	A8/B	W11W12W13	2300	160	1510	380	45.0	10km/h	1640	1910	2175	2450	2715	2990							
									30km/h	1350	1570	1790	2015	2235	2460							
									40km/h	1265	1470	1675	1885	2090	2300							
									50km/h	1265	1470	1675	1885	2090	2300							
380/85R34	147/147	A8/B	W11W12W13	3075	240	1510	380	45.0	10km/h	1875	2155	2475	2795	3110	3430	3755	3995					
									30km/h	1545	1775	2035	2300	2560	2820	3090	3290					
									40km/h	1445	1660	1905	2150	2395	2640	2890	3075					
									50km/h	1445	1660	1905	2150	2395	2640	2890	3075					



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg												
									kPa	60	80	100	120	140	160	200	240	280	320	360	400
420/85R24	137/134	A8/B	W13W14LW15L	2300	160	1324	418	48.0	10km/h 1640 30km/h 1350 40km/h 1265 50km/h 1165	1735 1570 1470 1355	1910 1790 1675 1545	2175 2015 1885 1735	2450 2235 2090 1925	2715 2500 2360 2120	2990 2660 2300 2020						
420/85R28	139/136	A8/B	W13W14LW15L	2430	160	1425	418	48.0	10km/h 1735 30km/h 1425 40km/h 1335 50km/h 1230	2020 1660 1555 1430	2200 1890 1770 1635	2300 2125 2090 1835	2595 2360 2210 2035	2875 2630 2500 2240	3155 2820 2675 2430						
420/85R30	140/137	A8/B	W13W14LW15L	2500	160	1476	418	48.0	10km/h 1785 30km/h 1470 40km/h 1375 50km/h 1265	2080 1950 1600 1470	2270 2190 2050 1885	2665 2500 2375 2090	2955 2740 2625 2300	3250 2930 2775 2430	3525 3175 3000 2650						
420/85R34	142/139	A8/B	W13W14LW15L	2650	160	1578	418	48.0	10km/h 1890 30km/h 1555 40km/h 1455 50km/h 1335	2200 1810 1695 1555	2505 2065 1930 1770	2820 2320 2170 1990	3130 2575 2410 2210	3445 2835 2650 2430	3770 3290 3075 2800						
420/85R38	144/141	A8/B	W13W14LW15L	2800	160	1679	418	48.0	10km/h 2000 30km/h 1645 40km/h 1540 50km/h 1415	2325 1915 1790 1645	2650 2180 2040 1875	2980 2455 2295 2110	3305 2720 2545 2340	3640 2995 2800 2575	3995 3475 3250 3000						
460/85R30	145/142	A8/B	W14LW15LW16L	2900	160	1544	455	51.0	10km/h 2070 30km/h 1705 40km/h 1595 50km/h 1455	2410 1980 1855 1695	2745 2260 2115 1930	3085 2635 2375 2170	3425 2840 2635 2410	3770 3100 2900 2650	4115 3475 3250 3000						
460/85R34	147/144	A8/B	W14LW15LW16L	3075	160	1646	455	51.0	10km/h 2195 30km/h 1805 40km/h 1690 50km/h 1540	2550 2100 2395 2240	2910 2395 2695 2520	3275 3630 2990 2795	3630 3995 3290 3075	3995 3795 3290 2800	4225 3475 3250 3000						
460/85R38	149/146	A8/B	W14LW15LW16L	3250	160	1747	455	51.0	10km/h 2320 30km/h 1905 40km/h 1785 50km/h 1650	2700 2225 2080 1920	3080 2850 2665 2460	3460 3160 2955 2730	3840 3475 3250 3000	4225 3475 3250 3000	4585 3875 3640 3300						
460/85R42	150/147	A8/B	W14LW15LW16L	3350	160	1849	455	51.0	10km/h 2390 30km/h 1965 40km/h 1840 50km/h 1690	2780 2285 2140 1965	3175 2615 2445 2240	3565 2935 2745 2520	3955 3580 3045 2795	4355 3800 3350 3075	4755 4115 3600 3225						
460/85R46	152/149	A8/B	W14L	3550	160	1943	464	51.0	10km/h 2535 30km/h 2085 40km/h 1950 50km/h 1785	2950 2430 2590 2370	3365 3115 3270 2665	3785 3455 3410 2665	4195 3795 3550 3075	4615 3795 3550 3075	5035 4225 3995 3640	5525 4545 4250 3865	5900 5010 4685 4260	6455 5480 5120 4660	7085 5830 5450 5000		
460/85R46	158/155	A8/B	W14L	4250	240	1943	464	51.0	10km/h 2595 30km/h 2135 40km/h 1995 50km/h 1820	2980 2815 2635 2090	3425 3180 2975 2710	3865 3545 3315 3020	4305 4750 3655 3330	4955 5150 3995 3875	5525 4545 4250 3865	6090 5010 4685 4260	6655 5480 5120 4660	7085 5830 5450 5000			
520/85R38	155/152	A8/B	DW16L DW18L	3875	160	1849	516	54.0	10km/h 2765 30km/h 2275 40km/h 2130 50km/h 1950	3220 2650 2825 2270	3670 3020 3175 2910	4125 3395 3528 3230	4585 3770 3875 3550	5035 4145 3875 3550	5560 4415 4115 3710						
520/85R42	157/154	A8/B	DW16L DW18L	4125	160	1951	516	54.0	10km/h 2940 30km/h 2420 40km/h 2265 50km/h 2060	3430 2820 3010 2400	3910 3220 3405 2735	4390 3615 3750 3075	4875 4010 4250 3410	5360 4415 4115 3710	5830 4415 4115 3710						
520/85R42	167/164	A8/B	DW16L DW18L	5450	320	1951	516	54.0	10km/h 3325 30km/h 2740 40km/h 2560 50km/h 2330	3825 3145 2940 2675	4390 3615 3375 3070	4955 4080 4375 3815	5525 4545 4850 4250	6090 5010 5480 4685	6655 5480 5830 5120	7085 5830 5450 5000					
420/80R46	145/142	A8/B	W12W13	2900	160	1840	418	47.0	10km/h 2070 30km/h 1705 40km/h 1595 50km/h 1455	2410 1980 1855 1695	2745 2260 2115 1930	3085 2540 2375 2170	3425 2815 2635 2410	3770 3100 2900 2650	4115 3475 3250 3000						
420/80R46	151/148	A8/B	W12W13	3450	240	1840	418	47.0	10km/h 2107 30km/h 1734 40km/h 1621 50km/h 1524	2421 1993 2139 1751	2745 2288 2415 2010	3085 2878 2691 2529	3425 2878 3070 2750	3770 3174 3469 3243	4115 3710 3691 3450						



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg																			
									kPa	60	80	100	120	140	160	200	240	280	320	360	400							
480/80R42	151/151	A/8/B	DD16L DW16L W16L DW16A* W16A*	3450	160	1835	479	49.0	10km/h	2460	2865	3265	3670	4075	4485													
									30km/h	2025	2355	2690	3020	3350	3690													
									40km/h	1895	1895	2205	2515	2825	3135	3450												
									50km/h	1895	2205	2515	2825	3135	3450													
									10km/h	2440	2805	3220	3640	4055	4470	5200												
480/80R42	156/156	A/8/B	DD16L DW16L W16L DW16A* W16A*	4000	240	1835	479	49.0	30km/h	2010	2310	2650	2995	3335	3680	4280												
									40km/h	1880	1880	2160	2480	2800	3120	3440												
									50km/h	1880	2160	2480	2800	3120	3440	4000												
									10km/h	2590	2980	3425	3865	4305	4750	5525												
									30km/h	2130	2455	2815	3180	3545	3910	4545												
480/80R46	158/158	A/8/B	DD16L DW16L W16L DW16A* W16A*	4250	240	1936	479	49.0	40km/h	1995	2295	2635	2975	3315	3655	4250												
									50km/h	1995	2295	2635	2975	3315	3655	4250												
									10km/h	1890	2200	2505	2820	3130	3445													
									30km/h	1555	1810	2065	2320	2575	2830													
									40km/h	1455	1695	1930	2170	2410	2650													
420/90R30	142/139	A/8/B	DW13 W14L	2650	160	1518	418	48.0	50km/h	1335	1555	1770	1990	2210	2430													
									10km/h	1875	2155	2475	2795	3110	3430	3995												
									30km/h	1545	1775	2035	2300	2560	2820	3290												
									40km/h	1445	1660	1905	2150	2395	2640	3075												
									50km/h	1315	1510	1735	1960	2180	2405	2800												
420/90R30	147/144	A/8/B	DW13 W14L	3075	240	1518	418	48.0	10km/h	1515	1760	2006	2293	2538	2784	3235	3562											
									30km/h	1250	1475	1700	1890	2115	2310	2725	2985											
									40km/h	1170	1380	1590	1770	1980	2160	2550	2790											
									50km/h	1060	1250	1440	1605	1795	1960	2315	2530											
									10km/h	1215	1440	1660	1905	2150	2395	2640	3075											
320/90R46(R-1)	146/143	A/8/B	W9W10W11	3000	320	1744	319	37.0	30km/h	1250	1475	1700	1890	2115	2310	2725	2985											
									40km/h	1170	1380	1590	1770	1980	2160	2550	2790											
									50km/h	1060	1250	1440	1605	1795	1960	2315	2530											
									10km/h	1515	1760	2006	2293	2538	2784	3235	3562											
									30km/h	1246	1449	1651	1887	2089	2291	2662	2931											
320/90R46(R-1)	148/148	A/8/B	W9W10W11	3150	360	1744	319	37.0	40km/h	1165	1354	1543	1764	1953	2142	2488	2740											
									50km/h	1060	1232	1404	1604	1778	1948	2255	2493											
									10km/h	1980	2280	2615	2955	3295	3630	4225												
									30km/h	1630	1875	2155	2430	2710	2990	3475												
									40km/h	1525	1755	2015	2275	2535	2795	3250												
380/90R46	149/149	A/8/B	W11 W12 W13	3250	240	1852	380	45.0	50km/h	1525	1755	2015	2275	2535	2795	3250												
									10km/h	1980	2300	2625	3000	3320	3640	4230	4660											
									30km/h	1630	1895	2160	2465	2730	2990	3480	3835											
									40km/h	1525	1770	2020	2310	2555	2805	3255	3585											
									50km/h	1525	1770	2020	2310	2555	2805	3255	3585											
380/90R46	157/157	A/8/B	W11 W12 W13	4125	360	1852	380	45.0	10km/h	1980	2300	2625	3000	3320	3640	4230	4660											
									30km/h	1630	1895	2160	2465	2730	2990	3480	3835											
									40km/h	1525	1770	2020	2310	2555	2805	3255	3585											
									50km/h	1525	1770	2020	2310	2555	2805	3255	3585											
									50km/h	1525	1770	2020	2310	2555	2805	3255	3585											



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
280/70R20	116/113	A8/B	W9 W10	1250	240	900	282	35.5	10km/h 30km/h 40km/h 50km/h	1210 905 855 750	1385 1035 975 860	1520 1135 1070 945	1555 1160 1095 1040	1580 1210 1115 1060	1620 1230 1160 1085	1650 1275 1160 1105	1775 1325 1250 1160					
360/70R24	122/119	A8/B	W10W11W12	1500	160	1152	357	42.0	10km/h 30km/h 40km/h 50km/h	1070 880 825 745	1245 1025 960 870	1420 1170 1095 990	1595 1315 1230 1115	1770 1460 1365 1235	1950 1605 1500 1365	2135 1780 1600 1460	2275 1870 1750 1600					
360/70R24	127/124	A8/B	W10W11W12	1750	240	1152	357	42.0	10km/h 30km/h 40km/h 50km/h	1065 875 820 750	1225 1010 945 860	1410 1160 1085 990	1590 1310 1225 1120	1770 1460 1365 1245	1955 1610 1505 1375	2135 1760 1645 1500	2275 1870 1750 1600					
380/70R24	125/125	A8/B	W11W12W13	1650	160	1190	380	43.0	10km/h 30km/h 40km/h 50km/h	2070 1705 1595 905	2410 1980 1855 1055	2745 2260 2115 1200	3085 2540 2375 1350	3425 3100 2900 1650	3600 3100 2900 1650	3770 3100 2900 1650						
420/70R24	130/127	A8/B	W12W13W14L	1900	160	1248	418	44.0	10km/h 30km/h 40km/h 50km/h	1355 1115 1045 960	1575 1300 1215 1120	1800 1480 1385 1275	2020 1660 1555 1435	2240 1845 1725 1590	2470 2030 1900 1750	2600 2030 1900 1750						
420/70R24	136/133	A8/B	W12W13W14L	2240	240	1248	418	44.0	10km/h 30km/h 40km/h 50km/h	1365 1120 1050 965	1565 1285 1205 1110	1800 1480 1385 1275	2030 1670 1565 1440	2265 1865 1745 1605	2500 2055 1925 1770	2735 2250 2105 1935	2910 2395 2240 2060					
420/70R28	133/130	A8/B	W12W13W14L	2060	160	1349	418	44.0	10km/h 30km/h 40km/h 50km/h	1465 1205 1130 1045	1705 1405 1315 1215	1950 1605 1500 1385	2190 2190 2060 1555	2430 2000 1870 1725	2675 2200 2060 1900	2910 2200 2060 1900						
420/70R28	139/136	A8/B	W12W13W14L	2430	240	1349	418	44.0	10km/h 30km/h 40km/h 50km/h	1480 1215 1140 1050	1700 1400 1310 1205	1955 1610 1505 1385	2210 2060 1900 1745	2460 2230 2085 1925	2710 2435 2280 2105	2960 2600 2430 2240	3155 2600 2430 2240					
480/70R24	138/135	A8/B	W14LW15LW16L	2360	160	1316	479	47.0	10km/h 30km/h 40km/h 50km/h	1680 1385 1295 1195	1960 1615 1510 1395	2235 1840 1720 1590	2515 2070 1935 1785	2785 2525 2145 1980	3065 2525 2145 1980	3300 2525 2145 1980						
480/70R28	140/137	A8/B	W14LW15LW16L	2500	160	1421	479	47.0	10km/h 30km/h 40km/h 50km/h	1785 1470 1375 1265	2080 1710 1600 1470	2370 1950 1825 1675	2665 2190 2050 1885	2955 2430 2275 2090	3250 2675 2500 2200	3500 2675 2500 2200						
480/70R28	145/142	A8/B	W14LW15LW16L	2900	240	1421	479	47.0	10km/h 30km/h 40km/h 50km/h	1770 1455 1360 1245	2035 1670 1565 1430	2335 1920 1795 1640	2635 2170 2030 1855	2940 2415 2260 2065	3240 2690 2490 2275	3540 2725 2500 2275	3770 3100 2900 2650	4170 3430 3205 3015	4485 3690 3450 3240			
480/70R28	151/148	A8/B	W14LW15LW16L	3450	320	1421	479	47.0	10km/h 30km/h 40km/h 50km/h	1745 1435 1345 1260	2060 1695 1585 1490	2375 1955 1825 1715	2645 2175 2035 1910	2960 2435 2265 2140	3225 2655 2435 2330	3540 2915 2735 2560	3810 3135 2920 2755					
480/70R34	143/143	A8/B	W14LW15LW16L	2725	160	1580	479	47.0	10km/h 30km/h 40km/h 50km/h	1940 1595 1495 1405	2260 1860 1740 1740	2580 2120 1985 1985	2895 2385 2230 2235	3215 2645 2475 2475	3540 2915 2725 2725	3810 3135 2920 2725						
480/70R38	145/142	A8/B	W14LW15LW16L	2900	160	1681	479	47.0	10km/h 30km/h 40km/h 50km/h	2070 1705 1595 1455	2410 1980 1855 1695	2745 2260 2115 1930	3085 2540 2375 2170	3425 3100 2900 2650	3600 3100 2900 2650	3770 3100 2900 2650						
520/70R38	150/150	A8/B	W15LW16LW18L	3350	160	1749	516	48.0	10km/h 30km/h 40km/h 50km/h	2460 1895 1895	2885 2205 2205	3265 2515 2515	3670 2825 2825	4075 3135 3135	4485 3450 3450	4895 3690 3450						
580/70R38	155/155	A8/B	W18L	3875	160	1827	577	50.0	10km/h 30km/h 40km/h 50km/h	2765 2275 2130 2130	3220 2650 2480 2480	3670 3020 2825 2825	4125 3395 3175 3175	4580 3770 3525 3525	5035 4145 3875 3875	5535 4450 4250 4250	6080 5005 4680 4680	6705 5520 5160 5160	7095 5840 5450 5450			
580/70R38	170/167	A8/B	W18L	6000	280	1827	577	50.0	10km/h 30km/h 40km/h 50km/h	3900 2760 2580 2340	4445 3210 3000 2725	4980 4100 3840 3105	5535 4555 4260 3480	6080 5005 4680 3865	6705 5520 5160 4250	7095 5840 5450 4685						



LR650

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
440/65R24	128/131	D/A8	W13W14L W15L	1800	160	1182	441	45.0	10km/h 30km/h 40km/h 50km/h	1310 1155 1090 1055	1540 1365 1290 1245	1755 1550 1635 1415	1965 1735 1900 1585	2150 1900 1950 1735	2340 2070 2070 1890							
440/65R28	131/134	D/A8	W13W14L W15L	1950	160	1283	441	45.0	10km/h 30km/h 40km/h 50km/h	1415 1250 1185 1145	1670 1475 1395 1345	1900 1680 1590 1530	2125 1880 1780 1715	2330 2060 1950 1860	2535 2240 2120 2045							
480/65R24	133/136	D/A8	W14LW15L	2060	160	1234	479	46.0	10km/h 30km/h 40km/h 50km/h	1415 1250 1185 1145	1670 1475 1395 1345	1900 1680 1590 1530	2125 1880 1780 1715	2330 2060 1950 1860	2535 2240 2120 2045							
480/65R28	136/139	D/A8	W14LW15L	2240	160	1335	479	46.0	10km/h 30km/h 40km/h 50km/h	1625 1440 1360 1315	1920 1695 1600 1550	2180 1930 1820 1760	2440 2160 2040 1970	2675 2390 2235 2160	2910 2635 2430 2350							
540/65R24	140/143	D/A8	W16LW18L	2500	160	1312	550	48.0	10km/h 30km/h 40km/h 50km/h	1820 1610 1525 1470	2145 1895 1795 1730	2435 2155 2040 1965	2730 2415 2285 2205	2990 2690 2505 2415	3250 2950 2725 2625							
540/65R28	142/145	D/A8	W16LW18L	2650	160	1413	550	48.0	10km/h 30km/h 40km/h 50km/h	1820 1610 1525 1470	2145 1895 1795 1730	2435 2155 2040 1965	2730 2415 2285 2205	2990 2690 2505 2415	3250 2950 2725 2625							
540/65R30	150/153	D/A8	W16LW18L	3350	240	1464	550	48.0	10km/h 30km/h 40km/h 50km/h	2045 1805 1715 1650	2395 2115 2005 1930	2740 2425 2295 2210	3045 2695 2555 2460	3350 3195 3025 2705	3610 3580 3390 3265	4050 3850 3650 3515						
540/65R34	145/148	D/A8	W16LW18L	2900	160	1566	550	48.0	10km/h 30km/h 40km/h 50km/h	1865 1760 1705 1620	2200 2075 2005 1910	2500 2360 2280 2175	2800 2645 2555 2435	3065 2895 2800 2665	3335 3150 3045 2900							
540/65R38	153/156	D/A8	W16LW18L	3650	240	1667	550	48.0	10km/h 30km/h 40km/h 50km/h	2225 1970 1865 1800	2605 2305 2185 2105	2980 2635 2580 2405	3320 2935 2780 2680	3650 3240 3060 2950	3930 3580 3695 3175	4405 3895 3975 3555	4745 4195 3975 3820					
600/65R28	147/150	D/A8	DW20BW18L	3075	160	1491	591	52.0	10km/h 30km/h 40km/h 50km/h	2235 1975 1875 1805	2635 2330 2210 2125	2995 2650 2510 2415	3355 2980 2810 2705	3675 3250 3080 2965	3995 3520 3350 3225							
600/65R34	157/160	D/A8	DW20BW18L	4125	240	1644	591	52.0	10km/h 30km/h 40km/h 50km/h	2515 2225 2105 2030	2940 2600 2465 2375	3370 2980 2825 2720	3750 3315 3025 3025	4125 3650 3460 3330	4445 4410 4240 4025	4985 4740 4505 4330	5360 4740 4480 4330					
600/65R38	153/156	D/A8	DW20BW18L	3650	160	1745	591	52.0	10km/h 30km/h 40km/h 50km/h	2655 2345 2240 2140	3130 2765 2640 2525	3555 3145 3000 2870	3985 3520 3360 3215	4365 3855 3680 3520	4745 4195 4000 3830							
650/65R38	157/160	D/A8	DW20B	4125	160	1811	645	56.0	10km/h 30km/h 40km/h 50km/h	3000 2650 2520 2420	3535 3125 2970 2855	4020 3555 3375 3245	4500 3980 3780 3635	4930 4360 4140 3980	5360 4740 4500 4330							
650/65R42	165/168	D/A8	DW20B	5150	240	1913	645	56.0	10km/h 30km/h 40km/h 50km/h	3145 2780 2630 2540	3680 3255 3080 2970	4215 3725 3525 3405	4685 4140 3920 3780	5155 4555 4310 4160	5555 4910 5005 4885	6225 5505 5205 5405	6695 5920 6060 5405					
710/70R38	166/169	D/A8	DW23B	5300	160	1959	716	57.0	10km/h 30km/h 40km/h 50km/h	3410 3245 3115 2965	4020 3825 3670 3495	4570 4350 4170 3975	5115 4870 4670 4450	5605 5335 5115 5005	6095 5800 5655 5300							
710/70R42	168/171	D/A8	DW23B	5600	160	2061	716	57.0	10km/h 30km/h 40km/h 50km/h	4075 3605 3440 3290	4800 4250 4055 3880	5460 4830 4610 4410	6115 5405 5165 4935	6695 6040 5655 5405	7280 6440 6150 5880							
710/70R42	173/176	D/A8	DW23B	6500	240	2061	716	57.0	10km/h 30km/h 40km/h 50km/h	3970 3510 3335 3205	4645 4110 3905 3750	5320 4705 4470 4295	5915 5230 5465 4975	6505 5755 5890 5255	7010 6200 6600 5660	7855 6950 7100 6435	8450 7475 7100 6825					

Harvesters



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg														
									kPa	60	80	100	120	140	160	200	240	280	320	360	400		
800/65R32	167	D	DW25B DW27B DH27B	5450	160	1853	798	58.0	10km/h				5310	5950	6515	7085							
									30km/h				4700	5260	5765	6265							
									40km/h				4475	5010	5485	5965							
									50km/h				4290	4805	5260	5720							
									65km/h				4085	4575	5010	5450							
800/65R32	172	D	DW25B DW27B DH27B	6300	240	1853	798	58.0	10km/h				5155	5730	6305	6795	7615	8190					
									30km/h				4560	5070	5575	6010	6735	7245					
									40km/h				4345	4825	5310	5725	6415	6895					
									50km/h				4165	4630	5090	5490	6150	6615					
									65km/h				3965	4410	4850	5225	5855	6300					
800/65R32	178	D	DW25B DW27B DH27B	7500	320	1853	798	58.0	10km/h				4800	5360	6110	6850	7605	8720	9230	9750			
									30km/h				4245	4740	5405	6060	6725	7715	8165	8625			
									40km/h				4045	4515	5145	5770	6405	7345	7770	8212			
									50km/h				3875	4330	4935	5530	6140	7045	7455	7875			
									65km/h				3695	4125	4700	5270	5850	6710	7100	7500			
800/65R32	181/181	A8/B	DW25B DW27B DH27B	8250	360	1853	798	58.0	10km/h				5255	6005	6645	7290	8040	8470	9330	10080	10735		
									30km/h				4325	4940	5470	6000	6620	6970	7675	8295	8825		
									40km/h				4040	4620	5115	5610	6185	6515	7175	7755	8250		
									50km/h				4040	4620	5115	5610	6185	6515	7175	7755	8250		



LR7000

Radial Agricultural Tire

1. Up to 10% load.
2. Enhance bead strength.
3. Longer service life.
4. Excellent stability and comfort.
5. More efficient traction.
6. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg											
									kPa	60	80	100	120	140	160	200	240	280	320	360
600/70R28	157	D	DW18L DW20B W18L	4125	240	1551	591	52.5	10km/h	2520	2945	3375	3750	4125	4450	4985	5360			
									30km/h	2225	2605	2985	3320	3650	3935	4410	4740			
									40km/h	2120	2480	2845	3160	3475	3745	4195	4515			
									50km/h	2035	2380	2725	3030	3330	3590	4025	4330			
									65km/h	1935	2265	2595	2885	3175	3420	3835	4125			
600/70R28	161/161	A8/B	DW18L DW20B W18L	4625	280	1551	591	52.5	10km/h	2585	3005	3425	3845	4265	4685	5170	5470	6010		
									30km/h	2125	2470	2820	3165	3510	3855	4255	4500	4945		
									40km/h	1985	2310	2635	2960	3280	3605	3975	4205	4625		
									50km/h	1985	2310	2635	2960	3280	3605	3975	4205	4625		
									65km/h	1985	2310	2635	2960	3280	3605	3975	4205	4625		
600/70R30	152	D	DW18L DW20B W18L	3550	160	1602	591	52.5	10km/h	2285	2690	3060	3425	3755	4080					
									30km/h	2175	2565	2915	3265	3575	3885					
									40km/h	2085	2455	2795	3130	3425	3725					
									50km/h	1985	2340	2660	2980	3265	3550					
									65km/h	1985	2340	2660	2980	3265	3550					
600/70R30	158	D	DW18L DW20B W18L	4250	240	1602	591	52.5	10km/h	2595	2980	3425	3865	4305	4750	5190	5525			
									30km/h	2295	2635	3025	3420	3810	4200	4590	4885			
									40km/h	2185	2510	2880	3255	3625	4000	4370	4650			
									50km/h	2095	2405	2765	3120	3480	3835	4190	4460			
									65km/h	1995	2295	2635	2975	3315	3655	3995	4250			
650/85R38	173/176	D/A8	DW20B DW21B DW23B	6500	240	2071	645	65.0	10km/h	3970	4645	5320	5915	6505	7010	7855	8450			
									30km/h	3510	4110	4705	5230	5755	6200	6950	7475			
									40km/h	3325	3895	4460	4955	5455	5880	6585	7085			
									50km/h	3205	3750	4295	4775	5255	5660	6345	6825			
									65km/h	3055	3575	4095	4550	5005	5395	6045	6500			

Sprayers



LR9000

Radial Agricultural Tire

1. Better soil protection.
2. Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg												
									kPa	60	80	100	120	140	160	200	240	280	320	360	400
380/90R50	151/151	A8/B	W11W12W13	3450	240	1954	380	48.0	10km/h	2080	2405	2755	3065	3445	3770	4095	4485				
									30km/h	1710	1975	2265	2525	2835	3100	3370	3690				
									40km/h	1600	1850	2120	2360	2650	2900	3150	3450				
									50km/h	1600	1850	2120	2360	2650	2900	3150	3450				
									10km/h	2045	2395	2745	3100	3450	3740	4150	4385	4795	5205	5555	5850
380/90R50	160/157	A8/B	W11W12W13	4500	400	1954	380	48.0	30km/h	1685	1970	2260	2550	2840	3080	3415	3610	3945	4285	4570	4815
									40km/h	1575	1845	2115	2385	2655	2880	3195	3375	3690	4005	4275	4500
									50km/h	1430	1675	1920	2170	2415	2620	2905	3070	3355	3640	3890	4125



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg												
									kPa	60	80	100	120	140	160	200	240	280	320	360	400
320/90R46(R-1)	146/143	A8/B	W9W10W11	3000	320	1744	319	37.0	10km/h	1520	1790	2065	2300	2570	2805	3080	3315	3625	3900		
									30km/h	1250	1475	1700	1890	2115	2310	2535	2725	2985	3210		
									40km/h	1170	1380	1590	1770	1980	2160	2370	2550	2790	3000		
									50km/h	1060	1250	1440	1605	1795	1960	2150	2315	2530	2725		
320/90R46(R-1)	148/148	A8/B	W9W10W11	3150	360	1744	319	37.0	10km/h	1515	1760	2005	2290	2535	2780	3070	3235	3560	3845	4095	
									30km/h	1245	1445	1650	1885	2085	2290	2525	2660	2930	3165	3370	
									40km/h	1165	1350	1540	1760	1950	2140	2360	2485	2740	2960	3150	
									50km/h	1165	1350	1540	1760	1950	2140	2360	2485	2740	2960	3150	
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0	10km/h	1465	1705	1950	2190	2430	2675						
									30km/h	1205	1405	1605	1800	2000	2200						
									40km/h	1130	1315	1500	1685	1870	2060						
									50km/h	1045	1215	1385	1555	1725	1900						
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0	10km/h	1985	2280	2615	2955	3295	3630	3970	4225				
									30km/h	1630	1875	2155	2430	2710	2990	3265	3475				
									40km/h	1525	1755	2015	2275	2535	2795	3055	3250				
									50km/h	1525	1755	2015	2275	2535	2795	3055	3250				
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0	10km/h	1980	2300	2625	3000	3320	3640	4020	4230	4660	5035	5360	
									30km/h	1630	1895	2160	2465	2730	2995	3305	3480	3835	4145	4410	
									40km/h	1525	1770	2020	2310	2555	2805	3090	3255	3585	3875	4125	
									50km/h	1525	1770	2020	2310	2555	2805	3090	3255	3585	3875	4125	

Trailers



LBI301

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
600/50R22.5IMP	159	D	AG20.00	4375	400	1172	611	25.0	10km/h	1990	2330	2670	3010	3355	3635	4035	4265	4660	5060	5400	5685	
									30km/h	1760	2060	2360	2665	2965	3215	3570	3770	4125	4475	4775	5030	
									40km/h	1675	1960	2250	2535	2825	3065	3400	3590	3925	4260	4550	4790	
									50km/h	1605	1880	2155	2430	2705	2935	3260	3440	3765	4085	4360	4590	
									65km/h	1530	1790	2055	2315	2580	2800	3105	3280	3585	3890	4155	4375	
650/65R30.5IMP	176	D	AG20.00	7100	400	1621	645	32.0	10km/h	5800	6450	7430	8405	9055	10360	10965	11570	12175	12780	13385		
									30km/h	4900	5495	6395	7290	7885	9080	9615	10150	10685	11220	11755	12290	
									40km/h	4280	4785	5545	6305	6805	8100	8420	8820	9240	9660	10080	10500	
									50km/h	3790	4245	4920	5600	6055	6960	7370	7775	8180	8590	9000	9410	
									65km/h	3170	3540	4090	4645	5015	5750	6090	6425	6760	7100	7440	7780	
850/50R30.5IMP	182	D	AG28.00	8500	400	1625	862	32.0	10km/h	6430	7145	8210	9280	9995	11420	12390	13360	14330	15300	16270		
									30km/h	5370	6035	7025	8020	8665	10010	10865	11720	12575	13430	14285	15140	
									40km/h	4620	5190	6050	6905	7475	8620	9355	10090	10825	11560	12295	13030	
									50km/h	4110	4620	5380	6145	6655	7670	8325	8980	9635	10290	10945	11600	
									65km/h	3400	3820	4450	5080	5500	6340	6880	7420	7960	8500	9040	9580	



FL300

Radial Agricultural Tire

1. Steel belted construction.
2. Good wear resistance.
3. Good ride-comfort performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
500/60R22.5IMP	155	D	AG16.00	3875	400	1172	503	18.0	10km/h	2440	2855	3275	3695	4115	4460	4950	5230	5715	6205	6625	6975	
									30km/h	2045	2395	2750	3100	3450	3745	4155	4385	4795	5205	5555	5850	
									40km/h	1845	2160	2475	2790	3105	3370	3740	3950	4320	4690	5005	5270	
									50km/h	1640	1920	2200	2485	2765	3000	3325	3515	3845	4170	4455	4685	
									65km/h	1355	1585	1820	2050	2285	2480	2750	2905	3175	3445	3680	3875	
560/60R22.5IMP	165	D	AG16.00 16.00 17.00 AG20.00	5150	500	1244	543	18.0	10km/h	3285	3650	4195	4740	5105	5830	6560	7285	8015	8745			
									30km/h	2755	3060	3515	3975	4285	4890	5500	6110	6720	7335	7950	8565	
									40km/h	2485	2755	3165	3580	3855	4405	4955	5505	6055	6605	7155	7705	
									50km/h	2210	2455	2815	3185	3430	3920	4410	4895	5385	5875	6365	6855	
									65km/h	1820	2025	2230	2635	2835	3240	3645	4045	4450	4855	5255	5655	
560/45R22.5IMP	152	D	AG16.00	3550	400	1076	543	18.0	10km/h	2235	2615	3000	3385	3770	4085	4535	4790	5235	5685	6070	6390	
									30km/h	1875	2195	2515	2840	3160	3430	3805	4020	4395	4770	5090	5360	
									40km/h	1685	1975	2265	2555	2845	3085	3425	3620	3955	4295	4585	4825	
									50km/h	1500	1760	2015	2275	2535	2745	3045	3220	3520	3820	4080	4295	
									65km/h	1240	1455	1665	1880	2095	2270	2520	2660	2910	3155	3370	3550	
600/55R26.5IMP	165	D	AG20.00	5150	400	1333	611	20.0	10km/h	4200	4675	5380	6090	6565	7510	7950	8380	8830	9270	9710		
									30km/h	3560	3995	4640	5290	5725	6590	6980	7365	7750	8140	8530	8920	
									40km/h	3100	3465	4020	4570	4935	5670	6000	6335	6670	7000	7330	7660	
									50km/h	2750	3080	3570	4065	4395	5050	5345	5640	5935	6230	6525	6820	
									65km/h	2300	2565	2970	3370	3635	4170	4415	4660	4905	5150	5395	5640	
650/55R26.5IMP	169	D	AG20.00	5800	400	1389	645	24.0	10km/h	4660	5525	6020	6820	7360	8450	8955	9440	9945	10440	10945		
									30km/h	3910	4635	5050	5720	6175	7085	7510	7915	8340	8755	9160	9565	
									40km/h	3520	4175	4545	5150	5560	6385	6765	7130	7510	7885	8260	8635	
									50km/h	3130	3710	4045	4585	4945	5680	6015	6345	6685	7015	7345	7675	
									65km/h	2590	3070	3345	3790	4090	4695	4975	5245	5515	5785	6055	6325	
710/50R26.5IMP	170	D	AG20.00 AG24.00	6000	400	1383	727	24.0	10km/h	4900	5450	6275	7100	7650	8750	9260	9775	10290	10800	11310		
									30km/h	4140	4645	5400	6155	6660	7670	8120	8575	9030	9480	9930	10380	
									40km/h	3610	4040	4680	5325	5755	6610	7000	7385	7770	8155	8540	8925	
									50km/h	3200	3585	4155	4730	5115	5880	6225	6570	6915	7260	7605	7950	
									65km/h	2680	2990	3460	3925	4235	4860	5145	5430	5715	6000	6285	6570	
710/50R30.5IMP	173	D	AG20.00 AG24.00	6500	400	1485	727	26.0	10km/h	5310	5905	6800	7695	8290	9480	10055	10590	11125	11660			
									30km/h	4490	5035	5855	6675	7220	8310	8800	9290	9780	10270	10760	11250	
									40km/h	3910	4375	5070	5765	6230	7160	7580	8000	8420	8840	9260	9680	
									50km/h	3470	3885	4505	5125	5540	6370	6745	7120	7495	7870	8245	8620	
									65km/h	2900	3240	3745	4255	4595	5270	5580	5885	6190	6500	6805	7110	



Compact line



LR451 Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg														
									kPa	60	80	100	120	140	160	200	240	280	320	360	400		
460/70R24 IND	152/152	A8/B	DW14L DW15L DW16L	3550	320	1254	455	36.0	0km/h	4740	5150	5590	6440	7475	8165								
									10km/h	2575	2800	3035	3500	4060	4435								
									30km/h	2140	2330	2530	2910	3380	3690								
									40km/h	2060	2240	2430	2800	3250	3550								
									50km/h	1875	2040	2210	2550	2960	3230								
460/70R24 IND	159/159	A8/B	DW14L DW15L DW16L	4375	400	1254	455	36.0	0km/h							5590	6440	7475	8165	9200	10060		
									10km/h							3040	3500	4060	4440	5000	5470		
									30km/h							2525	2910	3380	3690	4160	4550		
									40km/h							2430	2800	3250	3550	4000	4375		
									50km/h							2430	2800	3250	3550	4000	4375		
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	39.0	0km/h	4025	4715	5405	6095	6785	7360	8165	8625	9430	10235	10925	11500		
									10km/h	2625	3075	3525	3975	4425	4800	5325	5625	6150	6675	7125	7500		
									30km/h	1870	2190	2515	2835	3155	3420	3795	4010	4385	4760	5080	5350		
									40km/h	1750	2050	2350	2650	2950	3200	3550	3750	4100	4450	4750	5000		
									50km/h	1750	2050	2350	2650	2950	3200	3550	3750	4100	4450	4750	5000		



LR400 Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0	0km/h	4025	4715	5405	6095	6785	7360	8165	8625	9430	10235	10925	11500	
									10km/h	2625	3075	3525	3975	4425	4800	5325	5625	6150	6675	7125	7500	
									30km/h	1870	2190	2515	2835	3155	3420	3795	4010	4385	4760	5080	5350	
									40km/h	1750	2050	2350	2650	2950	3200	3550	3750	4100	4450	4750	5000	
									50km/h	1750	2050	2350	2650	2950	3200	3550	3750	4100	4450	4750	5000	
400/70R18 IND	147/147	A8/B	13.00	3075	400	1017	404	23.0	0km/h							3880	4165	4710	5260	5855	6455	
									10km/h							2535	2720	3075	3430	3825	4215	
									30km/h							1980	2125	2400	2680	2985	3290	
									40km/h							1850	1985	2245	2505	2790	3075	
									50km/h							1850	1985	2245	2505	2790	3075	
400/70R20 IND	149/149	A8/B	13.00	3250	400	1068	404	23.0	0km/h							3905	4230	4880	5530	6180	6830	
									10km/h							2545	2760	3180	3605	4030	4455	
									30km/h							2115	2265	2570	2870	3175	3480	
									40km/h							1960	2100	2375	2650	2950	3250	
									50km/h							1960	2100	2375	2650	2950	3250	



LR400

Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Suitable for loaders and backhoe loaders.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Pressure(kPa)-Load per tyre in kg													
									kPa	60	80	100	120	140	160	200	240	280	320	360	400	
405/70R18	141/153	B/A2	13	2575	380	1025	407	23.0	0km/h			2575	2815	3040	3280	3750	4215	4695	5445	5630	5870	
									10km/h			1605	1755	1900	2050	2340	2630	2930	3400	3515	3665	
									30km/h			1285	1405	1515	1635	1530	2105	2340	2715	2810	2930	
									40km/h			1160	1270	1375	1480	1690	1905	2120	2460	2540	2650	
									50km/h			1130	1235	1335	1440	1645	1850	2060	2390	2470	2575	
405/70R20	143/155	B/A2	13	2725	380	1076	407	23.0	0km/h			2720	2970	3220	3470	3965	4495	4965	5460	5960	6210	
									10km/h			1700	1855	2010	2165	2480	2790	3100	3415	3725	3880	
									30km/h			1360	1485	1610	1735	1980	2230	2480	2725	2975	3100	
									40km/h			1225	1340	1450	1565	1790	2020	2245	2470	2695	2810	
									50km/h			1190	1300	1410	1520	1740	1960	2180	2400	2620	2725	



OTR Tire





E-3/L-3

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
29.5-29	28	25.00/3.5	19000	425	12150	325	750	1975	40.0	TL



LL25(E-3/L-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	25.0	TL
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	25.5	TT/TL
17.5-25	16	14.00/15	7300	475	4250	300	445	1350	25.5	TT/TL
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL
23.5-25	18	19.50/2.5	10500	350	6700	275	595	1615	31.5	TT
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT
26.5-25	20	22.00/3.0	13200	350	8250	250	675	1750	35.0	TT
26.5-25	24	22.00/3.0	14000	400	9250	300	675	1750	35.0	TL
26.5-25	28	22.00/3.0	15500	475	10000	350	675	1750	35.0	TT/TL
29.5-25	28	25.00/3.5	17500	425	11500	325	750	1875	40.0	TL

Loader



LL25(E-3/L-3)

OTR Tire

- 1. Available for large rigid dump trucks.
- 2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
16.00-25	28	11.25/2.0	11500	750	6700	575	430	1495	28.5	TT/TL
16.00-25	32	11.25/2.0	12500	875	7300	650	430	1495	28.5	TT/TL
16.00-25	36	11.25/2.0	13600	975	7750	725	430	1495	28.5	TT



LL26(E-3)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT/TL
18.00-25	40	13.00/2.5	17000	950	9750	700	500	1615	30.0	TT/TL



LL56(E-3)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT
18.00-25	36	13.00/2.5	16000	850	9250	625	500	1615	30.0	TT



LL42(E-3)

OTR Tire

- 1. Available for large rigid dump trucks.
- 2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
14.00-24	28	10.0	10000	925	5600	650	375	1370	27	TT
14.00-25	36	10.00/1.5	11050	1100	5500	850	375	1370	27	TT



LL90(E-4)

OTR Tire

- 1. Available for large rigid dump trucks.
- 2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-33	32	13.00	17500	750	10000	575	500	1875	50.0	TL
18.00-33	36	13.00	18500	850	10600	625	500	1875	50.0	TL
18.00-33	40	13.00	19500	950	11200	700	500	1875	50.0	TL



E-2/L-2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	24.0	TL
17.5-25	12	14.00/1.5	6150	350	3650	225	445	1350	25.5	TT/TL
17.5-25	16	14.00/1.5	7300	475	4250	300	445	1350	25.5	TT/TL
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT



G-2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
13.00-24	12	8.00TG	5600	450	2725	300	335	1280	24.0	TL
13.00-24	18	8.00TG	6700	675	3500	450	335	1280	24.0	TL
14.00-24	12	8.00TG	6300	425	3075	275	360	1350	24.0	TT/TL
14.00-24	16	8.00TG	7300	550	3650	350	360	1350	24.0	TT/TL



Radial OTR



LMS401

OTR Tire

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.

Dump Truck

Good self cleaning

Flower chimb angle changed design, it delivers good self cleaning.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	50.5
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	55.5
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	60.5



DO993

OTR Tire

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	8.50	4875	700	8500	950	1300	350	30.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	30.0
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	30.0
▲ 13.00R25	☆☆☆	163	182	10.00	4875	700	8500	950	1300	350	28.0
▲ 14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	28.0
▲ 14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	28.0

attention: ▲ indicates information for DO993+



LB02S

OTR Tire

- 1.Exceptional traction and manoeuvreability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
18.00R33	☆☆	191	209	13.00/2.5	10900	650	18500	800	1877	498	53.0



LB06S

OTR Tire

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
750/65R25	☆☆	190	209	24.00/3.0	10600	475	18500	625	1610	754	43.5
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	42.5
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1873	750	42.5



LB03S

OTR Tire

- 1.Self-cleaning tread design provides good traction and stability on the soft and muddy ground.
- 2.Tire side anti-friction design , prevent tire side scratch damage.
- 3.Deepened tread provides excellent wear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	☆☆	177	195	11.25/2.0	7300	650	12150	800	1548	432	42.0
18.00R25	☆☆	185	204	13.00/2.5	9250	650	16000	800	1673	498	46.0



DM992

OTR Tire

- 1.Long life.
- 2.Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	24.0



DM992+

OTR Tire

- 1.Long life.
- 2.Excellent adhension and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	10.00	4875	700	8500	950	1300	350	26.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	26.0



LM01N

OTR Tire

- 1.Exceptional traction and manoeuvreability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1617	597	30.5



LB01N

OTR Tire

Loader

- 1.Exceptional traction and manoeuvreability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	☆☆	167	182	14.00/1.5	5450	475	8500	600	1348	445	27.0
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1492	520	30.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1617	597	33.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1873	750	39.0



LB03SD

OTR Tire

Exceptionally robust in masacre conditions

A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing.

A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.

Excellent compromise of adhesion and traction

A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion,traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	☆☆	167	182	14.00/1.5	5450	475	8500	600	1399	445	62.5
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1548	520	70.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	76.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	85.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	92.5



LB02SD

OTR Tire

Exceptional traction

Massive tread blocks characterise this tyre ;

High Efficiency

The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential
The sidewall/tread intersection design gives an excellent level of damage and cut resistance

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling
A directional pattern

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1548	520	70.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	76.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	85.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	92.5



LB06S

OTR Tire

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
850/65R25	☆☆	196	207	27.00/3.5	12500	475	17500	625	1740	850	44.5
750/65R25	☆☆	190	209	24.00/3.0	10600	475	18500	625	1610	754	43.5



LD702

OTR Tire

- 1.The combination of vertical and horizontal pattern groove.
- 2.Strengthened bead area and Tubeless solution preventing sudden pressure loss.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
24R20.5	☆/16PR	176	F	18.00	7100	600	1370	600	22.0



LM11N

OTR Tire

- 1.Exceptional traction and manoeuvreability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
445/95R25	☆☆	177	E	11.25/2.0	7300	900	1481	435	23.0
385/95R25	☆☆	170	E	10.00/1.5	6000	900	1369	379	21.0



LSN201

SNOW WORKS

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Suitable for snow work.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
15.525	☆☆	160	176	12.00/1.3	4500	475	7100	600	1277	394	25.0
17.525	☆☆	167	182	14.00/1.5	5450	475	8500	600	1348	445	28.0
20.525	☆☆	177	193	17.00/2.0	7300	475	11500	600	1492	520	32.0
23.525	☆☆	185	201	19.50/2.5	9250	475	14500	600	1617	597	33.0
26.525	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0